



# PRODUCT DATA SHEET

FOR JOHN DEERE 8000T

Trusted Parts Dealer Since 1873



# John Deere 8000T

| REFERENCE | WIDTH | LENGHT | TREAD | PITCH | TREAD HEIGHT | TREAD WIDTH | GUIDE LUGS | PLY | THICKNESS |
|-----------|-------|--------|-------|-------|--------------|-------------|------------|-----|-----------|
| 30"X6"x54 | 30"   | 324"   | 108   | 6"    | 2"           | 2"          | 54         | 4   | 1.5"      |

In the **John Deere** range, friction drive and positive drive technologies coexist, depending on the model.

For friction drives, we manufacture tracks with a short 6-inch pitch, which allows us to have a greater number of tread and drive lugs than most competing tracks, thus improving wear resistance and road performance.

For positive drives, our tracks are exactly the same as their original dimensions.

All our tracks feature simultaneous vulcanisation of the tread lugs, the drive studs and the track core, giving them greater resistance to tearing.

Thanks to their strength, reliability and original dimensions, Vulcan Agri tracks are perfectly suited to John Deere tractors and combines.



**✓ Fast delivery within 24 hours**  
Delivery by tracked priority courier throughout Europe or by charter for export outside the EU.


**✓ Complete range of agricultural tracks**  
A range of tracks from 18" to 36" wide for all makes of tracked agricultural machinery.

**✓ Adaptability of parts and guaranteed assembly**  
Our experts will determine the best dimensions for your machine and guarantee that the parts will fit.

**✓ Spare parts for undercarriage**  
A guaranteed, cost-effective range of rollers and wheels for all major makes of tractors and harvesters.

## Strong Cables

The track tensile strength is ensured by a full layer of 5.4mm, seamless tension cables. In addition, the track's core is reinforced with as much as four steel cable layers placed at special angles to maximise the core stiffness, making our tracks the best choice for durability and flexibility.

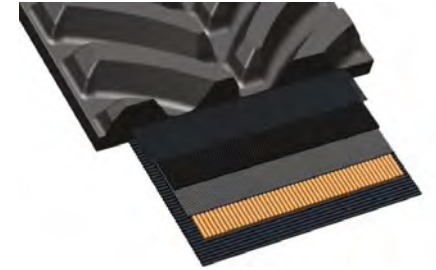

## One Step Vulcan

Vulcanisation in one step of track core, guide lugs and tread patterns reinforce solidity and prevent tread pull off. All track parts are strongly vulcanised and bonded together. Low wearability rubber compound offers extended lifetime.

## Engineered Quality

New self-cleaning tread bars improve traction whilst offering no vibrations. The tracks are designed to last and come with up to 2 years warranty on Friction and Positive Drive Machines.



## Trusted Dealer

Leach Lewis supply the industry only with high quality products at extremely competitive prices. We have a long tradition of servicing and maintaining high levels of customer satisfaction.

Range of tracks from 18" to 36" wide





LEACH LEWIS RUBBER TRACKS LIMITED  
Units 4-5 Hikers Way, Crendon Industrial Park, Long Crendon HP18 9RW  
[www.llrt.co.uk](http://www.llrt.co.uk)