
ECO MASTER SERIES SPRING TYPE MULTI DISC HARROW









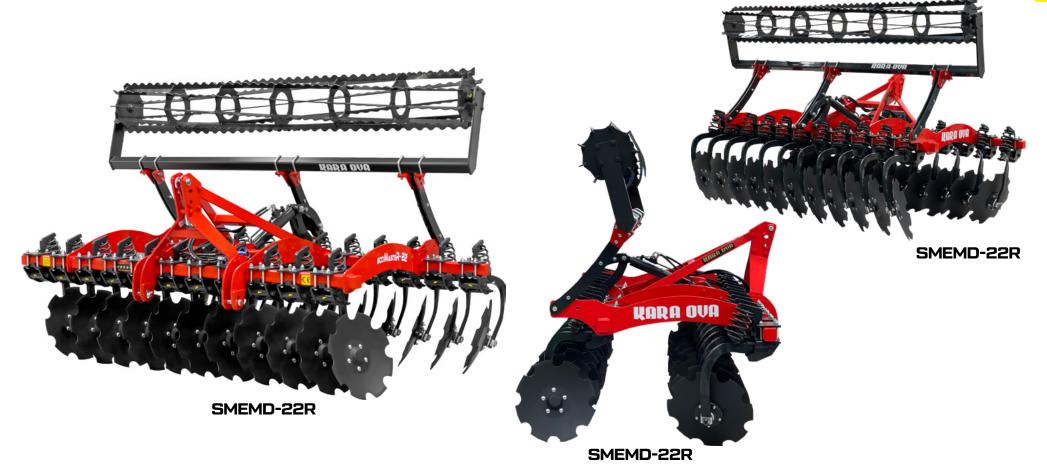

111111









GENERAL FEATURES

Its open design with large clearances effectively prevents blockage even when working with high contents of organic matter. The serrated concave discs (570-620 mm diameter), which are supported by maintenance-free angular ball bearings, form the basis for the outstanding quality of work produced by this highly durable implement. The concave disc beams, which are located inside closed pockets and feature robust coil springs to protect them against overloads, ensure precise disc guidance even under diffcult conditions. An impact harrow, which can be individually and finely adjusted, is provided behind the two rows of discs for precise deposition of the flow of soil. This improves the distribution of straw when driving at a diagonal angle to the direction of threshing.

TECHNICAL DETAILS

CODE	MODEL OF LEG	DISC DIAMETER (CM)	WORKING WIDTH (CM)	WORKING DEPTH (MM)	REQUIRED POWER (HP)
SMEMD-16	SPRING	57/62	200	250	50-60
SMEMD-18	SPRING	57/62	225	250	60-70
SMEMD-20	SPRING	57/62	250	250	70-80
SMEMD-22	SPRING	57/62	275	250	80-90
SMEMD-24	SPRING	57/62	300	250	90-100
SMEMD-26	SPRING	57/62	325	250	100-110
SMEMD-28	SPRING	57/62	350	250	110-130

CODE	MODEL OF LEG	TYPE OF ROLLER	DISC DIAMETER (CM)	WORKING WIDTH (CM)	WORKING DEPTH (MM)	REQUIRED POWER (HP)
SMEMD-16R	SPRING	HYDRAULIC FOLDABLE CAGE TYPE ROLLER	57/62	200	250	50-60
SMEMD-18R	SPRING		57/62	225	250	60-70
SMEMD-20R	SPRING		57/62	250	250	70-80
SMEMD-22R	SPRING		57/62	275	250	80-90
SMEMD-24R	SPRING		57/62	300	250	90-100
SMEMD-26R	SPRING		57/62	325	250	100-110
SMEMD-28R	SPRING		57/62	350	250	110-130



HEAD OFFICE

FACTORY

Add: Fevzi Cakmak Mh. 10758 Sk. No: 16/G 42050 Karatay/Konya/TURKEY Add: Büyükkayacık Osb, Yaylacık Cd. No: 23, 42250 Selcuklu/Konya/TURKEY

T: +90 332 290 00 20 F: +90 332 290 00 19 T: +90 332 239 18 85 T: +90 332 239 18 86 F: +90 332 239 18 87

www.soilmaster.com.tr



+90 (532) 137 01 74



info@soilmaster.com.tr



